

1



Mirror your image or artwork and ensure colours are intense (more than 50% saturation)



2


Run a few sheets of blank paper through the printer to warm it up to operating temperature. Select normal print quality and gradually increase the paper weight setting until the toner fuses well and the image does not smudge\*. Print one sheet at a time on the blank side of the **red** imaging paper using a bypass tray if possible

\*You may have to use a slow paper setting e.g. heavy paper, transparency or label mode. If in doubt, consult your printer manufacturer.




3

Place the image face down on substrate

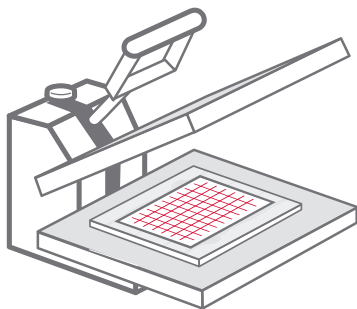

4

Press at **160°C / 320°F** with **heavy** pressure for **90 seconds**

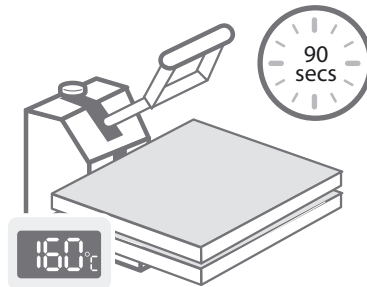

5



Peel whilst hot

Apply a varnish to improve durability



Store in a cool, dry place and seal the packaging between uses



Printed on 100% recycled paper

Product code: ICLL

contact



hello@yolo.co.uk



+44 (0) 2082 400 658



www.yolo.co.uk